


捲揚機



電壓(Voltage) : DC 10.8V~26.4V

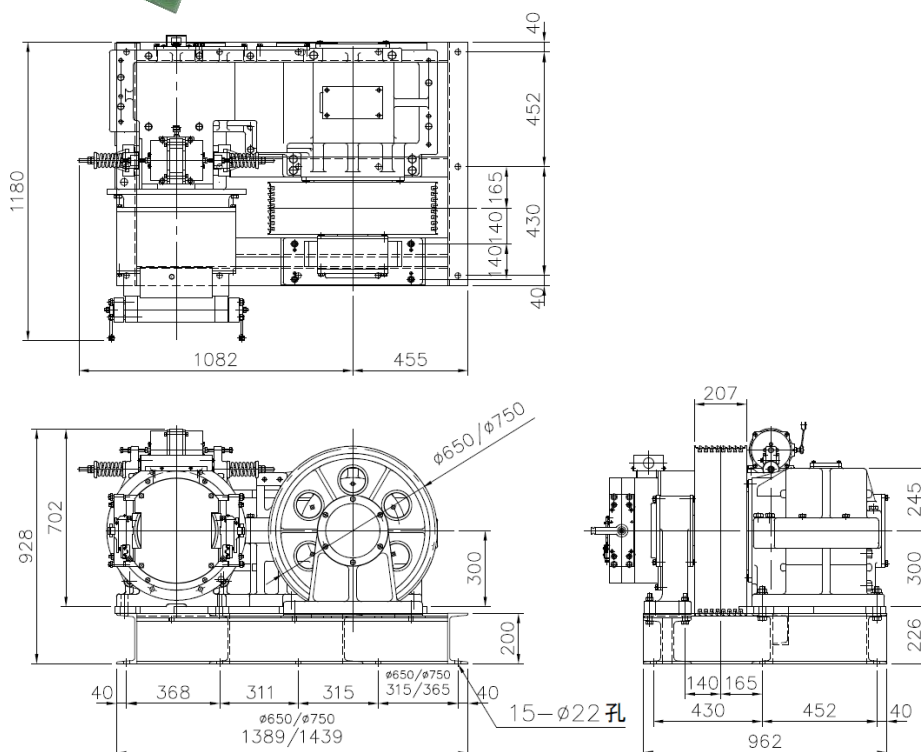

型號 Model	載重 Duty Load (kg)	速度 Speed (m/min)	掛比 (Roping)	減速比 Ratio	主槽輪 M/Sheave			馬達 Motor		
					節徑 Dia. (PCD) (mm)	鋼索 Rope (mm) φ 650/ φ 750	槽距 Pitch (mm) φ 650/ φ 750	功率 Power (kw)	極數 Poles	頻率 Frequency (Hz) φ 650/ φ 750
HB700F	4500	30	2 : 1	1/ 32.5	φ 650/ φ 750	φ 12/ φ 16	19/23	19	4	33/28
		45		30				48.6/42		
		60		40				50/43		
		90		56				49/42		
	5000	30		1/ 32.5				26		33/28
		45		1/ 25				34		48.6/42
		60		1/ 25				45		50/43
		90		1/ 16.5				67.5		49/42
	6000	30		1/ 32.5				26		33/28
		45		1/ 25				40		48.6/42
		60		1/ 25				50		50/43
	7500	30		1/ 32.5				34		33/28
		45						50		48.6/42

Ver.2309