

PM10-2800-B^{CE}



長岡機電股份有限公司

NAGAOKA MACHINERY CO.,LTD

Traction Machine

捲揚機



>額定電壓(Rated Voltage): AC 220V/AC 380V

>鋼絲繩繞法(Wrap): 單繞(Single)



>防護等級(Protection Class): IP41 Standard

>絕緣等級(INS. Class): F 級

>曳引機極數(Traction machine pole): 30

>啟動頻次(次/小時, Starts per hour): 240

>工作制(Rating): S5-40%

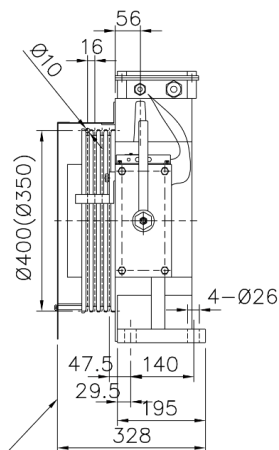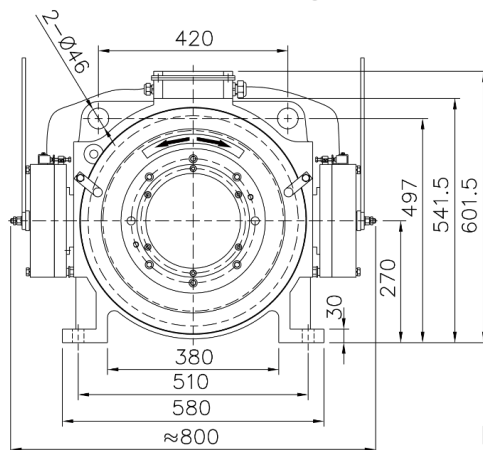

型號 Model	機種 Type	掛比 Roping	載重 Capacity (kg)	主機速度 Speed (m/min)	轆廂速度 Speed of elevator (m/min)	曳引輪 直徑 Sheave (mm)	槽數 Num	繩徑 (mm)	槽間距 Pitch (mm)	額定電流 Current (A) 220V/380V	額定轉速 Rated speed (rpm)	額定頻率 Rated Frequency (Hz)	額定功率 Power (kw)	額定轉矩 Rated torque (Nm)	最大軸負荷 Shaft Load (kg)	主機重量 Machine weight				
PM10-2800	B	1:1	320	30	30	φ 350	4~7	φ 8	12	8.2/5.2	27	6.8	1.05	370	2500	≈300				
				45	45					8.2/5.2	41	10.3	1.6							
				60	60					8.2/5.2	54	13.6	2.1							
				90	90					15.7/9.6	82	20.5	3.2							
				105	105					15.7/9.6	96	24	3.7							
			450	30	30					12.3/7.5	27	6.8	1.6	560						
				45	45					12.3/7.5	41	10.3	2.4							
				60	60					12.3/7.5	54	13.6	3.2							
				90	90					24/14.6	82	20.5	4.8							
				105	105					24/14.6	96	24	5.6							
		2:1	450	60	30	φ 350	4~7	φ 8	12	6.8/4	54	13.6	1.5	270						
				90	45					12.1/7.4	82	20.5	2.3							
				120	60					12.1/7.4	109	27.3	3.1							
				180	90					20.2/11.2	164	41	4.6							
				192	96					20.2/11.5	175	43.7	4.9							
				210	105					20.2/12	191	47.7	5.4							
			630	60	30					φ 400	3~6	φ 10	16	8.2/5.2			54	13.6	2.1	370
				90	45									15.7/9.6			82	20.5	3.2	
				120	60									15.7/9.6			109	27.3	4.2	
				180	90									27.8/15.4			164	41	6.4	
				192	96	27.8/15.7	175	43.7	6.8											
				210	105	27.8/16.3	191	47.7	7.4											
			450	60	30	7.3/4.2	48	12	1.6					320						
				90	45		13/7.7	72	18								2.4			
				120	60		13/7.7	96	24								3.2			
				180	90		20.3/11.3	144	36								4.8			
				192	96		20.3/11.6	153	38.3								5.1			
				210	105		20.3/12.4	168	42								5.6			
				240	120		23/14.5	192	48								6.4			
				630	60		30	10/5.6	48								12	2.3	460	
			90		45	17.7/10.4	72		18					3.5						
			120		60	17.7/10.4	96		24					4.6						
			180		90	29/16.7	144		36	6.9										
			192		96	29/17.1	153		38.3	7.4										
			210		105	29/17.8	168		42	8.1										
			240		120	33/20.2	192		48	9.3										

規格及尺寸變更, 恕不另行通知。

Subject to change without notice.

Ver.2309