

PM12-3000-B^{CE}






長岡機電股份有限公司

NAGAOKA MACHINERY CO.,LTD

Traction Machine

捲揚機

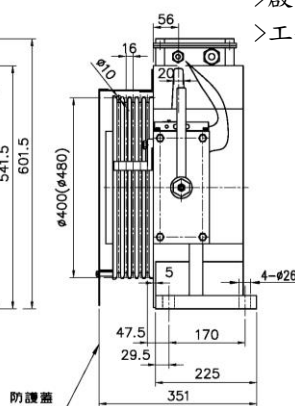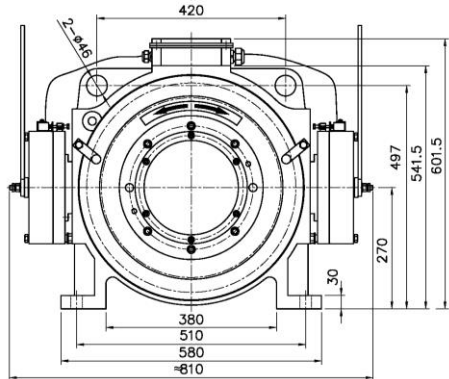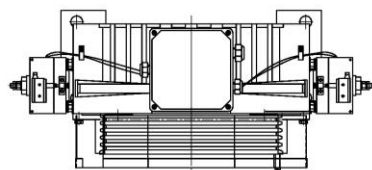

- >額定電壓(Rated Voltage): AC 220V/AC 380V
- >掛比(Roping): 2:1 & 1:1
- >額定載重量: 800~1000 kg & 450~550 kg
- >鋼絲繩繞法(Wrap): 單繞(Single)
- >轆廂速度(Car Speed): 30 ~120 m/min
- >防護等級(Protection Class): IP41 Standard
- >絕緣等級(INS. Class): F 級
- >曳引機極數(Traction machine pole): 30
- >啟動頻次(次/小時, Starts per hour): 240
- >工作制(Rating): S5-40%



型號 Model	機種 Type	掛比 Roping	載重 Capacity (kg)	主機速度 Speed (m/min)	轆廂速度 Speed of elevator (m/min)	曳引輪 直徑 Sheave (mm)	槽數 Num	繩徑 (mm)	槽間距 Pitch (mm)	額定電流 Current (A) 220V/380V	額定轉速 Rated speed (rpm)	額定頻率 Rated Frequency (Hz)	額定功率 Power (kw)	額定轉矩 Rated torque (Nm)	最大軸負荷 Shaft Load (kg)	主機重量 Machine weight		
PM12-3000	B	1:1	450	30	30	φ 400	3~6	φ 10	16	12.6/7.1	24	6	1.5	605	3500	≈350		
				45	45					12.6/7.1	36	9	2.3					
				60	60					12.6/7.1	48	12	3					
				90	90					22.4/12.8	72	18	4.6					
				105	105					22.4/13.8	84	21	5.3					
				120	120					22.4/13.8	96	24	6.1					
			800	30	30	φ 480	3~4	φ 12	18	13.4/8.4	20	5	1.7	800				
				45	45					13.4/8.4	30	7.5	2.5					
				60	60					13.4/8.4	40	9.95	3.4					
				90	90					24.7/15.1	60	15	5					
				105	105					24.7/15.1	70	17.5	5.8					
				120	120					24.7/15.1	80	20	6.7					
		2:1	800	60	30	φ 400	3~6	φ 10	16	11/6.4	48	12	2.6	520		≈330		
				90	45					20.2/12	72	18	3.9					
				120	60					20.2/12	96	24	5.2					
				180	90					33.5/20	144	36	7.8					
				210	105					33.5/20.7	168	42	9.1					
				240	120					38.5/23	192	48	10.5					
			800	60	30	φ 480	4~5	φ 12	18	9.7/6.3	40	9.95	2.6	605				
				90	45					19/11.2	60	15	3.8					
				120	60					19/11.2	80	19.9	5.1					
				180	90					34.3/20.4	119	29.8	8.3					
				210	105					34.3/21.2	139	34.8	9.7	665				
				240	120					39/24	159	39.8	11					
			1000	605	60	30	φ 400	4~6	φ 10	16	12.6/7.1	48	12	3.1			605	≈350
					90	45					22.4/13.8	72	18	4.6				
					120	60					22.4/13.8	96	24	6.1				
					180	90					41.5/25	144	36	10				
					210	105					41.5/26.2	168	42	11.7			665	
					240	120					49.3/29.8	192	48	13.4				
				800	60	30	φ 480	4~6	φ 12	18	13.4/8.4	40	9.95	3.4			800	
					90	45					24.7/15.1	60	15	5				
					120	60					24.7/15.1	80	19.9	6.7				
					180	90					40.7/25	119	29.8	10				
					210	105					40.7/25.6	139	34.8	11.7				
					240	120					46.5/29	159	39.8	13.3				

規格及尺寸變更，恕不另行通知。
Subject to change without notice.

Ver.2309