

鋼索頭

Thimble Rod




長岡機電股份有限公司

NAGAOKA MACHINERY CO.,LTD

特殊長度可訂製

Customized length is available.

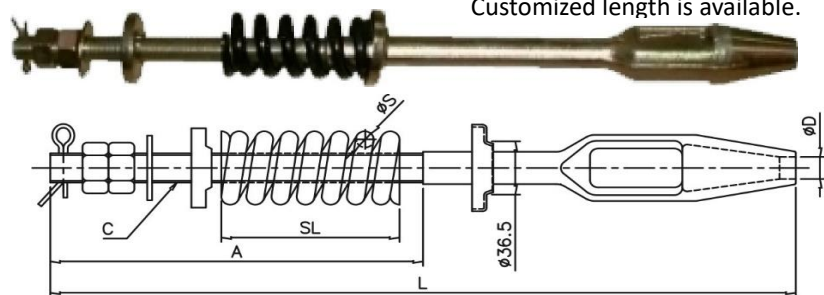

T-12460/T12460-S

T-12610/T12610-S

T-16700/T-16700-S


型式 Type	適用鋼索 Application of Wire rope	尺寸 Dimension (mm)				彈簧規格 Dimension of Spring		
		L	φD	A	C	φS	SL	
T-12460	φ12	460	14.2	230	M20	不附(Without)		
T-12460-S						11	110	附(With)
T-12610	φ12	610	14.2	230	M20	不附(Without)		
T-12610-S						11	110	附(With)
T-16700	φ16	700	18.2	260	M24	不附(Without)		
T-16700-S						12	140	附(With)

楔型鋼索頭

Rope Socket

特殊長度可訂製

Customized length is

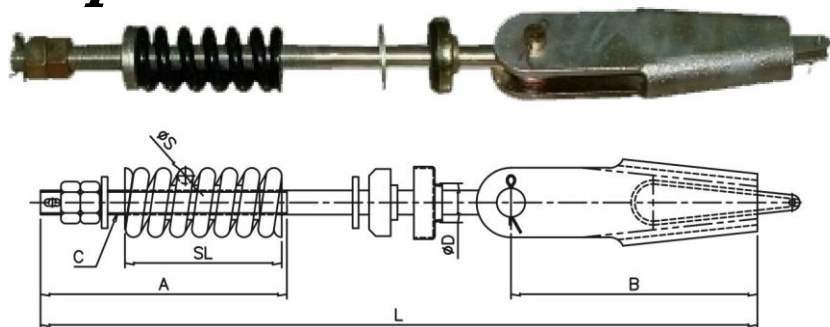

T-G08380/T-G08380-S

T-G08530/T-G08530-S

T-G10480/T-G10480-S

T-G10550/T-G10550-S

T-G10650/T-G10650-S

T-G12600/T-G12600-S

T-G12680/T-G12680-S

T-G12800/T-G12800-S

T-G12880/T-G12880-S

型式 Type	適用鋼索 Application of Wire rope	尺寸 Dimension (mm)					彈簧規格 Dimension of Spring		
		L	φD	A	B	C	φS	SL	
T-G08380	φ8	380	25	120	130	M12	不附(Without)		
T-G08380-S							6	113	附(With)
T-G08530		530	25	120	130	M12	不附(Without)		
T-G08530-S							6	113	附(With)
T-G10480	φ10	480	25	165	165	M16	不附(Without)		
T-G10480-S							10	105	附(With)
T-G10550		550	25	220	165	M16	不附(Without)		
T-G10550-S							10	105	附(With)
T-G10650	φ12	650	25	220	165	M16	不附(Without)		
T-G10650-S							10	105	附(With)
T-G12600		600	30.5	200	200	M20	不附(Without)		
T-G12600-S							11	110	附(With)
T-G12680		680	30.5	200	200	M20	不附(Without)		
T-G12680-S							11	110	附(With)
T-G12800		800	30.5	200	200	M20	不附(Without)		
T-G12800-S							11	110	附(With)
T-G12880	φ12	880	30.5	200	200	M20	不附(Without)		
T-G12880-S							11	110	附(With)

規格及尺寸變更，恕不另行通知。

Subject to change without notice.

Ver.2309