

# 緩衝彈簧




長岡機電股份有限公司

NAGAOKA MACHINERY CO.,LTD

## Buffer Spring

E-20280/E-20310/E-25347

E-30375/E-36405

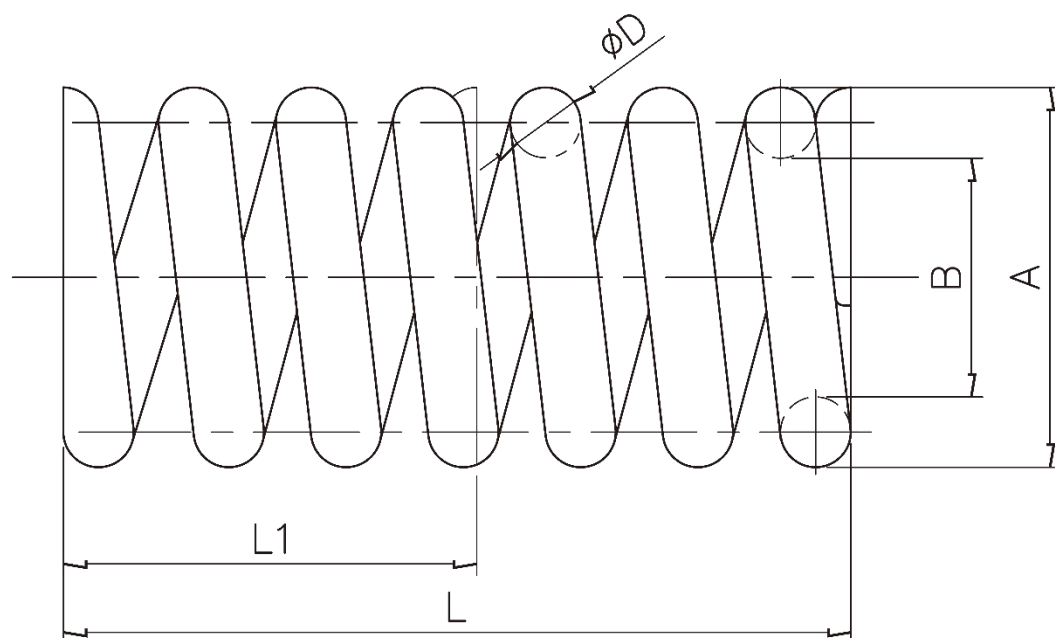

| 型式<br>Type | 容許載重量<br>Allowable gross mass<br>(kg) | 自由長度<br>Free Length<br>(mm) | 行程<br>Stroke<br>(mm) | 彈簧線徑<br>Size of material<br>(mm) | 彈簧外徑<br>Outside dia.<br>(mm) | 彈簧內徑<br>Inside dia.<br>(mm) |
|------------|---------------------------------------|-----------------------------|----------------------|----------------------------------|------------------------------|-----------------------------|
|            |                                       | L                           | L1                   | $\phi D$                         | A                            | B                           |
| E-20280    | 550~1100                              | 280                         | 100                  | $\phi 20$                        | 120                          | 80                          |
| E-20310    | 1000~2000                             | 310                         | 170                  | $\phi 20$                        | 130                          | 90                          |
| E-25347    | 1800~3500                             | 347                         | 147                  | $\phi 25$                        | 135                          | 85                          |
| E-30375    | 3300~5300                             | 375                         | 150                  | $\phi 30$                        | 157                          | 97                          |
| E-36405    | 5200~8000                             | 405                         | 153                  | $\phi 36$                        | 183                          | 111                         |

規格及尺寸變更，恕不另行通知。

Subject to change without notice.

Ver.2309