


導向輪




長岡機電股份有限公司
NAGAOKA MACHINERY CO.,LTD

Deflector Sheave

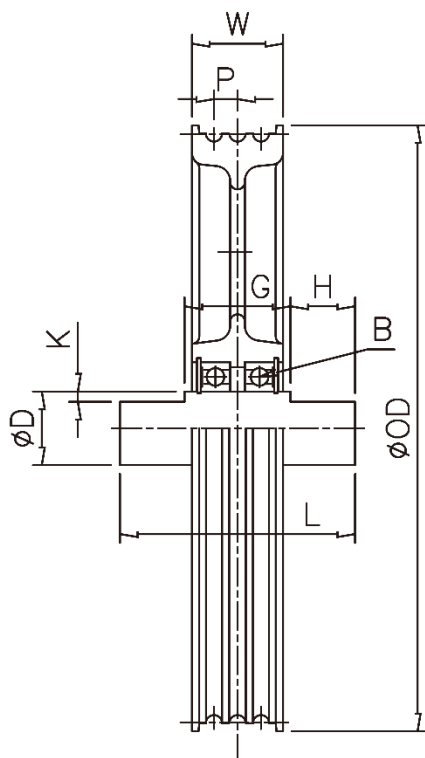


導向輪

Deflector sheave

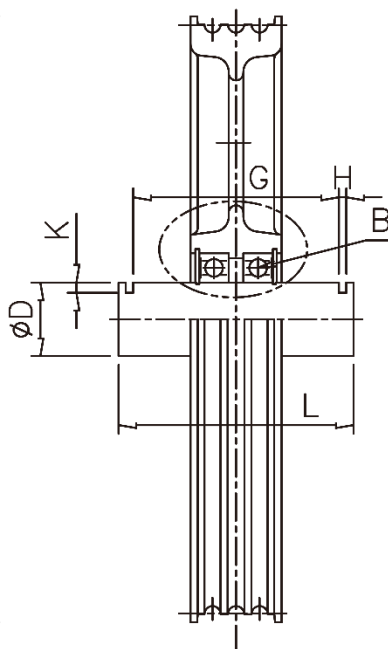

懸吊輪

Overhead sheav



材質(Material) : FC250

硬度(Hardness) : HB180-HB220

項目(Item) 規格(Spec)	軸徑 Dia. of shaft (mm)	槽距 Groove Pitch (mm)	槽輪外徑 Outside dia. (mm)	槽輪寬 Width of sheave (mm)	槽輪尺寸 Dimension of Sheave (mm)					軸尺寸 Dimension of shaft (mm)			
	φD	P	φD	W	B	A	C	E	F	L	G	H	K
φ240*3V*φ8	40	14	250	50	6208ZZ	25	0	80	80	依客戶要求 According to request			
φ320*3V*φ8	40	14	330	50	6208ZZ	25	0	80	80				
φ320*4V*φ8	50	14	330	64	6210ZZ	27	10	83	90				
φ400*3V*φ10	50	16	412	62	6210Z	26	10	83	90				
φ400*4V*φ10	60	16	412	73	6212Z	28.5	16	100	110				
φ400*5V*φ10	60	16	412	89	6212Z	31	27	100	110				
φ480*3V*φ12	50	19	496	70	6210Z	28.5	13	82	90				
φ480*4V*φ12	60	19	496	89	6212Z	31	27	100	110				
φ480*5V*φ12	65	19	496	108	6213Z	31.5	45	110	120				
φ480*6V*φ12	70	19	496	127	6214Z	34.5	58	115	125				
φ640*3V*φ16	80	25	661	100	6216Z	38	24	130	140				
φ640*4V*φ16	80	25	661	120	6216Z	38	44	130	140				
φ640*5V*φ16	90	25	661	145	6218Z	41.5	37	150	160				
φ640*6V*φ16	90	25	661	170	6218Z	42	66	150	160				

規格及尺寸變更，恕不另行通知。

Subject to change without notice.

Ver.2309