

P3-1500^{CE}

Traction Machine

捲揚機



長岡機電股份有限公司

NAGAOKA MACHINERY CO.,LTD

>主軸荷重(Max. Shaft Load): 1500 kg

>重量約(Weight): 100 kg

>馬達(Motor):

額定電壓(Rated Voltage): 220V / 380V

絕緣等級(INS. Class): F

>制動器(Brake):

電壓(Voltage): DC 110V

>編碼器(Encoder):

φ8 中空型(Central through type) 600 P/R




電壓(Voltage): DC 12V

>左右手均可，本圖為左手。

Left-hand or right-hand available. (Left shown)

>立式、臥式可供選配，本圖為臥式。

Horizontal type or vertical type are both applicable.
(Horizontal shown)

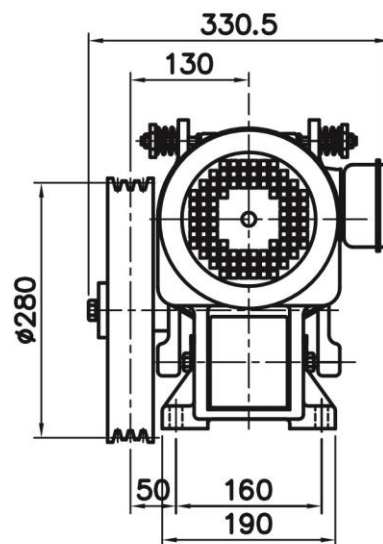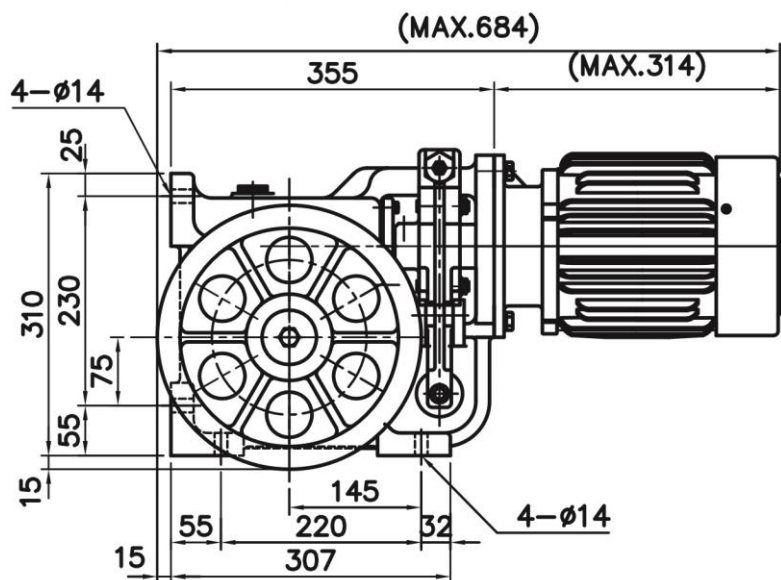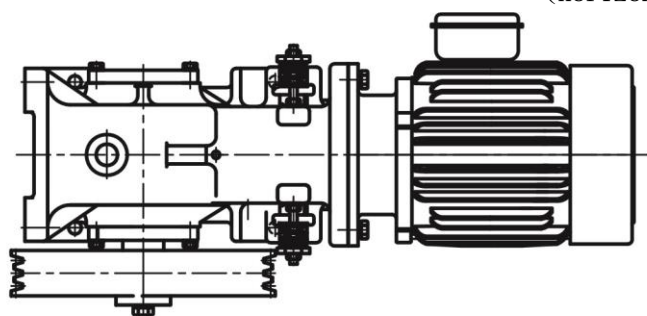

型號 Model	機種 Type	載重 Duty Load (kg)	速度 Speed (m/min)	掛比 (Roping)	減速比 Ratio	主槽輪 M/Sheave			馬達 Motor		
						節徑 Dia. (PCD) (mm)	鋼索 Rope (mm)	槽距 Pitch (mm)	功率 Power (kw)	極數 Poles	頻率 Frequency (Hz)
P3-1500	A	210	20	1 : 1	1 / 62	φ 280	φ 8 X 3	14	1.5	4	50
			25		1 / 50						
			30			φ 320					

規格及尺寸變更，恕不另行通知。
Subject to change without notice.

Ver.2309